


#6211

Protection capacitors

PPM 100-2.0 dvs J

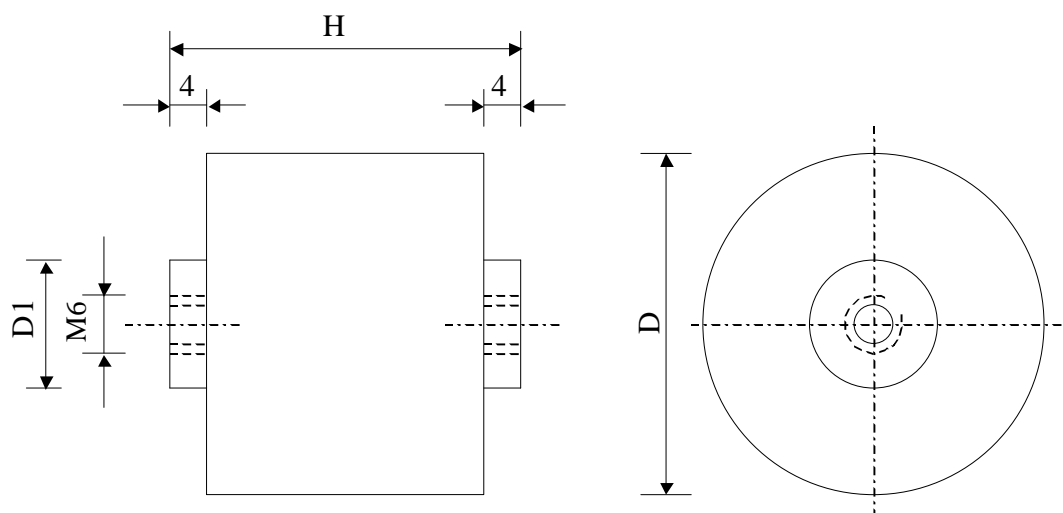

Dielectric of metallized polypropylene - Plastic sleeve

Polyurethane resin end sealing - Threaded outputs

Parameter	Symbol		Value	Unit	Condition
Capacitance	C		2	$\mu\text{F}$	1 V / 1 kHz
Tolerance			$\pm 5$	%	
Rated voltage	Un DC		1000	VDC	
Peak voltage	U peak		1600	V	
Surge voltage	U s		2000	V	
Rated voltage	Un RMS		560	Veff	max.
RMS Current max	Ieff		28	A	
Impulse current	I $\Delta$ t		6	A $^2$ s	non. repetitive
Tangent delta diele	tg $\delta$ o		2	$10^{-4}$	1 to 100 kHz
Serie resistance	RS		$\leq 1.6$	m $\Omega$	
Stray inductance	ESL		10	nH	
Thermal resistance	Rth		6.8	$^{\circ}\text{C}/\text{W}$	Hot spot - terminals
Insulation resistance	Ri x C		> 30'000	s	500 VDC - 1 min
Test voltage between terminals	U T1		2000	VDC	10 s
Test voltage terminals to case	U T2		4000	VAC	50 Hz / 1 min
Climatic category (IEC68)			40/85/56		
Estimated operational life (-3%)			200'000	h	Un DC - 70 $^{\circ}\text{C}$
Dimension	Symbol			Unit	Conditions
Diameter	$\varnothing$ D max		55	mm	
Height	H		50 $\pm$ 0.5	mm	
Terminals					
Thread			M6 x 6	mm	
	D1		14	mm	
	M1				
	M0	27.01.2014	HJJ		
	Modification	Date	Visa émetteur		

Condensateurs CH 1400 Yverdon-les-Bains  
 Kondensatoren Tel.: ++41 24 445 66 88  
 Capacitors Fax: ++41 24 445 66 89

**Leclanché**  
**Capacitors**  
A FISCHER & TAUSSCH COMPANY

HJJ

03.09.2013

faisab6211.XLS